




**SPECIFICATION  
CONTROL DRAWING  
Crystal Resonator**

**FREQUENCY**

32.768000kHz

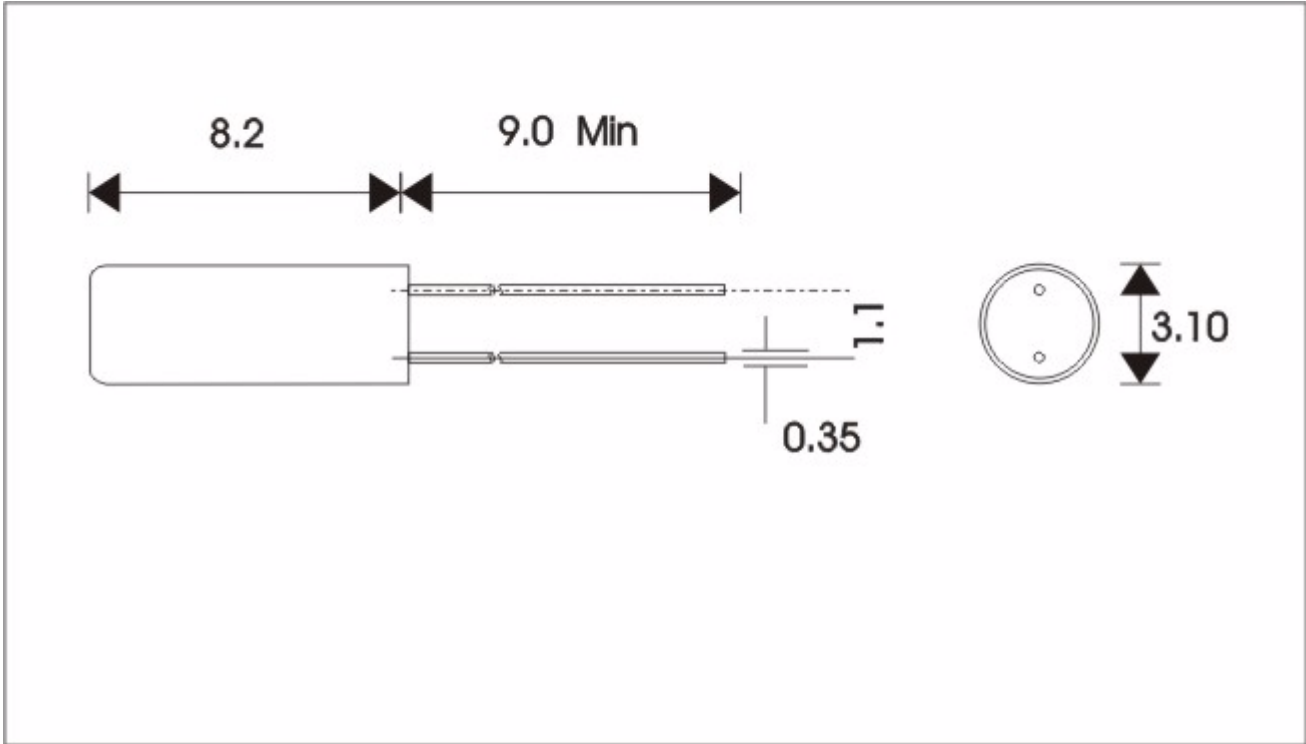

Holder Style	3x8 Cyl
Mode	Fundamental
Adjustment Tolerance	As required by CSR chipset
Temperature Stability	-0.042 PPM / °C <sup>2</sup>
Operating Temp. Range	-40°C to +85°C
Load Capacitance	12.5 pF
ESR	As required by CSR chipset
Static Capacitance (C0)	As required by CSR chipset
Ageing	+/-5ppm 1st Year Max
Marking	Mark Std

Amdt Date	Change Note	AEL Code
	CSR Approved	<b>X32K768L102</b>
		<b>Issue Ref</b> A