




SPECIFICATION CONTROL DRAWING Crystal Resonator

FREQUENCY
16.000000MHz

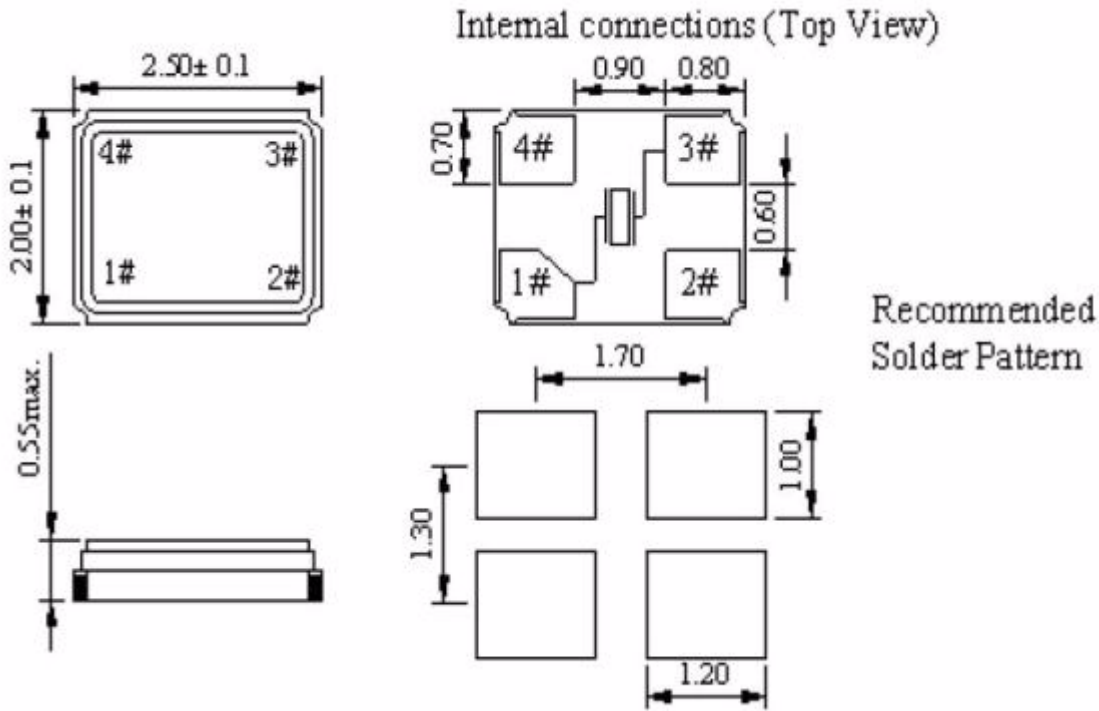

<p>Holder Style Mode Adjustment Tolerance Temperature Stability Operating Temp. Range Load Capacitance ESR Static Capacitance (C0) Ageing Marking</p>	<p>25x2x05 4-pad Fundamental As required by Nordic chipset As required by Nordic chipset -40°C to +85°C 8 pF As required by Nordic Chipset Unspecified pF +/-3ppm 1st Year Max AEL16.0 ww/yy</p>
---	--

Amdt Date	Change Note	AEL Code		
		X16M000000S207		
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Issue Ref</td> <td style="text-align: center;">A</td> </tr> </table>	Issue Ref	A
Issue Ref	A			