




**SPECIFICATION  
CONTROL DRAWING  
Crystal Resonator**

FREQUENCY
24.000000MHz

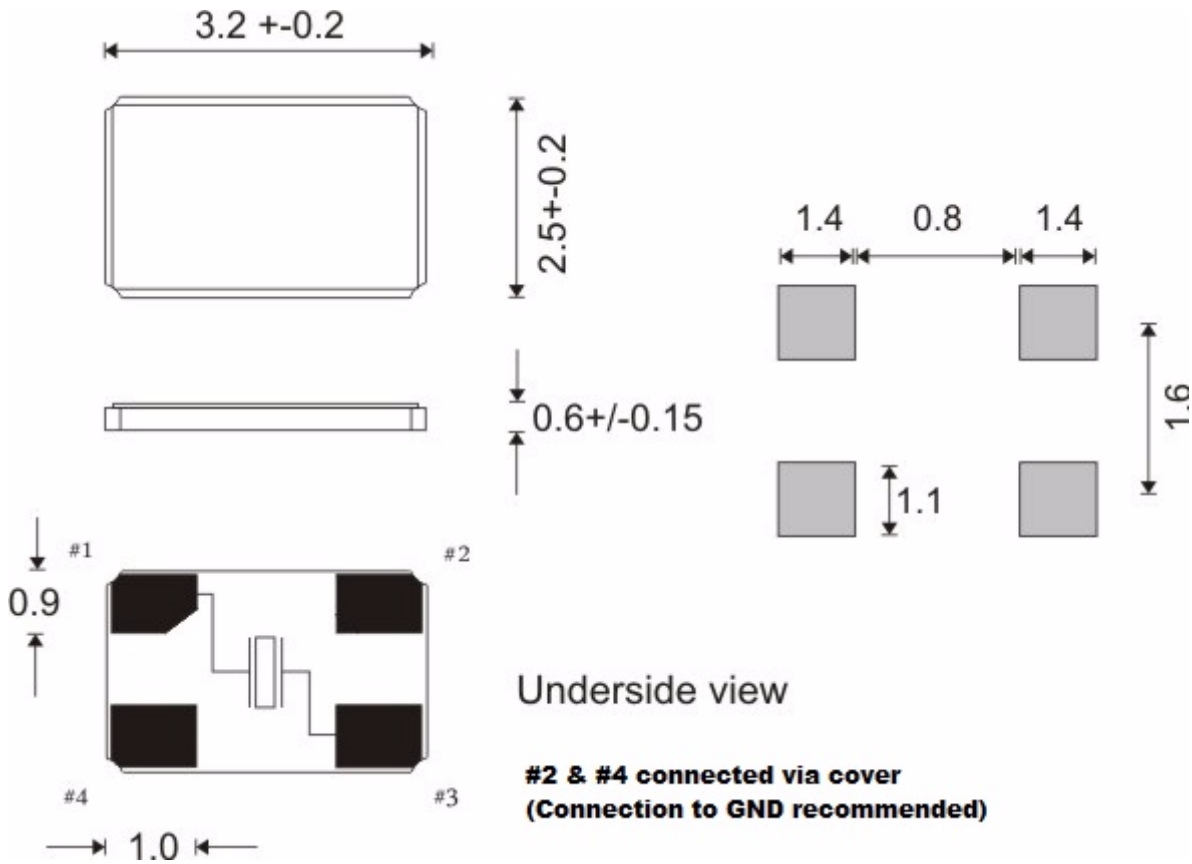

Holder Style  
Mode  
Adjustment Tolerance  
Temperature Stability  
Operating Temp. Range  
Load Capacitance  
ESR  
Static Capacitance (C0)  
Ageing  
Marking

3X25X06 4-Pad  
Fundamental  
As required by Silicon Labs chipset  
As required by Silicon Labs chipset  
-40°C to +85°C  
10 pF  
As required by Silicon Labs chipset  
As required by Silicon Labs chipset  
3.0ppm / Yr Max  
AEL24.00 WWYY

Amdt Date	Change Note	AEL Code
6 OCT 10		<b>X24M000000S050</b>
		<b>Issue Ref</b> C