




**SPECIFICATION
CONTROL DRAWING
Crystal Resonator**

FREQUENCY
16.000000MHz

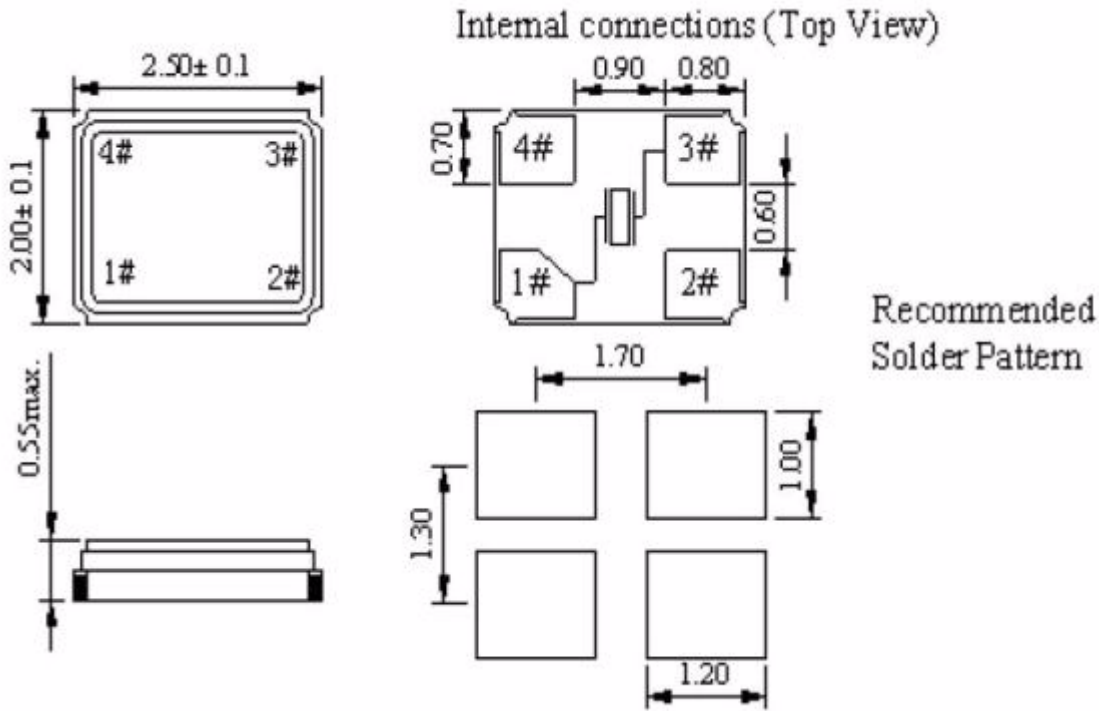

Holder Style	25x2x05 4-pad
Mode	Fundamental
Adjustment Tolerance	As required by CSR Chipset
Temperature Stability	As required by CSR Chipset
Operating Temp. Range	-40°C to +105°C
Load Capacitance	6 pF
ESR	As required by CSR Chipset
Static Capacitance (C0)	As required by CSR Chipset
Ageing	+/-3PPM 1st Year
Pulling	As required by CSR Chipset
Marking	16.000 YWWX

Amdt Date	Change Note	AEL Code
		A2SB16.0000F06K12AAE
		Issue Ref A